


**Prepared For:**  
TOWN OF ERIE  
Rich Lucas  
150 Bonnell Avenue  
Erie, CO 80516-6866  
(303)926 - 2883  
Reference ID: HOOKLIFT

**Presented By:**  
MCCANDLESS TRUCK CENTER LLC  
Ron Wasinger  
16704 EAST 32ND AVENUE  
AURORA CO 80011 -  
(303)739-9900

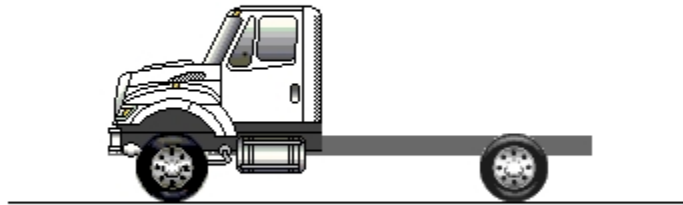

**Model Profile**  
**2020 HV507 SFA (HV507)**

<b>AXLE CONFIG:</b>	4X2
<b>MISSION:</b>	Requested GVWR: 35000. Calc. GVWR: 35000 Calc. Geared Speed: 84.8 MPH
<b>DIMENSION:</b>	Wheelbase: 171.00, CA: 96.00, Axle to Frame: 39.00
<b>ENGINE, DIESEL:</b>	{Cummins L9 330} EPA 2017, 330HP @ 2000 RPM, 1000 lb-ft Torque @ 1400 RPM, 2200 RPM Governed Speed, 330 Peak HP (Max)
<b>TRANSMISSION, AUTOMATIC:</b>	{Allison 3500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway
<b>CLUTCH:</b>	Omit Item (Clutch & Control)
<b>AXLE, FRONT NON-DRIVING:</b>	{Meritor MFS-14-143A} Wide Track, I-Beam Type, 14,000-lb Capacity
<b>AXLE, REAR, SINGLE:</b>	{Dana Spicer 21060D} Single Reduction, 21,000-lb Capacity, Driver Control Locking Differential, 200 Wheel Ends Gear Ratio: 4.88
<b>CAB:</b>	Conventional, Day Cab
<b>TIRE, FRONT:</b>	(2) 12R22.5 Load Range H HSC1 (CONTINENTAL), 482 rev/mile, 75 MPH, All-Position
<b>TIRE, REAR:</b>	(4) 11R22.5 Load Range G HDR2 (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
<b>SUSPENSION, REAR, SINGLE:</b>	23,500-lb Capacity, Vari-Rate Springs
<b>PAINT:</b>	Cab schematic 100WK Location 1: 9219, Winter White (Std) Chassis schematic N/A

**Description**

Base Chassis, Model HV507 SFA with 171.00 Wheelbase, 96.00 CA, and 39.00 Axle to Frame.

AXLE CONFIGURATION {Navistar} 4x2

**Notes**

: Pricing may change if axle configuration is changed.

FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.866" x 3.622" x 0.437" (276.0mm x 92.0mm x 11.1mm); 456.0" (11582mm) Maximum OAL

BUMPER, FRONT Swept Back, Steel, Heavy Duty

FRAME EXTENSION, FRONT Integral; 20" In Front of Grille

CROSSMEMBER, FRONT for Hydraulic Pump, Mounting Flange to Accommodate Pump

WHEELBASE RANGE 146" (370cm) Through and Including 195" (495cm)

AXLE, FRONT NON-DRIVING {Meritor MFS-14-143A} Wide Track, I-Beam Type, 14,000-lb Capacity

SUSPENSION, FRONT, SPRING Multileaf, Shackle Type, 14,000-lb Capacity, for Reduced Deflection Vocational Use, with Shock Absorbers

BRAKE SYSTEM, AIR Dual System for Straight Truck Applications

**Includes**

: BRAKE LINES Color and Size Coded Nylon

: DRAIN VALVE Twist-Type

: GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster

: PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel

: QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4

: SLACK ADJUSTERS, FRONT Automatic (with Air Cam Brakes)

: SLACK ADJUSTERS, REAR Automatic (with Air Cam Brakes)

: SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6

TRAILER CONNECTIONS Four-Wheel, with Hand Control Valve and Tractor Protection Valve, for Straight Truck

**Notes**

: When electronic stability control is ordered with trailer connections on a 4x2 truck, please check the operator manual for trailer weight restrictions.

DRAIN VALVE {Berg} with Pull Chain, for Air Tank

AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)

AIR DRYER {Bendix AD-IP} with Heater

BRAKE CHAMBERS, SPRING Relocated To Rear Of Rear Axle For Maximum Ground Clearance

BRAKE CHAMBERS, FRONT AXLE {Bendix} 20 SqIn

BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Spring Brake

BRAKES, FRONT, AIR CAM S-Cam; 16.5" x 5.0"; Includes 20 Sq. In. Long Stroke Brake Chambers

BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake

AIR COMPRESSOR {Cummins} 18.7 CFM

AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab

AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Left Rail, Back of Cab, Perpendicular to Rail

DUST SHIELDS, FRONT BRAKE for Air Brakes

DUST SHIELDS, REAR BRAKE for Air Brakes

**Description**

STEERING COLUMN Tilting

STEERING WHEEL 4-Spoke; 18" Dia., Black

STEERING GEAR {Sheppard M100} Power

DRIVELINE SYSTEM {Dana Spicer} 1710, for 4x2/6x2

AFTERTREATMENT COVER Aluminum

EXHAUST SYSTEM Single, Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab

TAIL PIPE (1) Turnback Type, Bright

EXHAUST HEIGHT 10'

MUFFLER/TAIL PIPE GUARD (1) Aluminum

SWITCH, FOR EXHAUST 2 Position, Lighted & Latching, On/Off Type, Mounted in IP, Inhibits Diesel Particulate Filter Regeneration as Long as Switch is in On Position

ELECTRICAL SYSTEM 12-Volt, Standard Equipment

**Includes**

: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab

: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel

: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever

: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light

: STARTER SWITCH Electric, Key Operated

: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector

: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature

: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever

: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted

: WIRING, CHASSIS Color Coded and Continuously Numbered

CIGAR LIGHTER Includes Ash Cup

HORN, ELECTRIC (2) Disc Style

ALTERNATOR {Leece-Neville AVI160P2013} Brush Type; 12 Volt 160 Amp. Capacity, Pad Mount, with Remote Sense

BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Sleeper, Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn

BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 2850CCA Total, Top Threaded Stud

2-WAY RADIO Wiring Effects; Wiring with 20 Amp Fuse Protection, Includes Ignition Wire with 5 Amp Fuse, Wire Ends Heat Shrink and Routed to Center of Header Console in Cab

RADIO AM/FM/WB/Clock/Bluetooth/USB Input/3.5MM Auxiliary Input, MP3, Apple Device Play & Control, Bluetooth for Phone & Music

SPEAKERS (2) 6.5" Dual Cone Mounted in Both Doors, (2) 5.25" Dual Cone Mounted in Both B-Pillars

AUXILIARY HARNESS 3.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications

TRAILER CONNECTION SOCKET 7-Way; Mounted at Rear of Frame, Wired for Turn Signals Independent of Stop, Compatible with Trailers That Have Amber or Side Turn Lamps

BATTERY BOX Steel, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Left Side Back of Cab

JUMP START STUD Remote Mounted

BACK-UP ALARM {Preco 1059} Electronic; Solid State, Dual Function, 112 dBA

WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time

**Description**

SWITCH, TOGGLE, FOR WORK LIGHT Lighted; on Instrument Panel and Wiring Effects for Customer Furnished Back of Cab Light

CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade

TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights

HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on

STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection

INDICATOR, LOW COOLANT LEVEL with Audible Alarm

ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened

CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses

TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender

HORN, AIR Black, Single Trumpet, with Lanyard Pull Cord

LOGOS EXTERIOR Model Badges

LOGOS EXTERIOR, ENGINE Badges

GRILLE Stationary, Chrome

BUG SCREEN Mounted Behind Grille

FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV

PAINT SCHEMATIC, PT-1 Single Color, Design 100

**Includes**

: PAINT SCHEMATIC ID LETTERS "WK"

PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

OVER THE AIR PROGRAMMING {Navistar} for Cummins Engines

PROMOTIONAL PACKAGE Government Silver Package

CLUTCH Omit Item (Clutch & Control)

ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection

BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines

**Includes**

: BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door

ENGINE, DIESEL {Cummins L9 330} EPA 2017, 330HP @ 2000 RPM, 1000 lb-ft Torque @ 1400 RPM, 2200 RPM Governed Speed, 330 Peak HP (Max)

FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed with Residual Torque Device for Disengaged Fan Speed

**Includes**

: FAN Nylon

RADIATOR Cross Flow, Series System; 1228 SqIn Aluminum Radiator Core and 1167 SqIn Charge Air Cooler

**Includes**

: DEAERATION SYSTEM with Surge Tank

: HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps

: RADIATOR HOSES Premium, Rubber

AIR CLEANER Dual Element, with Integral Snow Valve and In-Cab Control

**Description**

FEDERAL EMISSIONS {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2019

THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel

ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use

FAN OVERRIDE Manual; with Electric Switch on Instrument Panel, (Fan On with Switch On)

EMISSION COMPLIANCE Federal, Does Not Comply with California Clean Air Idle Regulations

ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; with Ignition Switch Control for Cummins ISB/B6.7 or ISL/L9 Engines

TRANSMISSION, AUTOMATIC {Allison 3500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway

OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil Type

SHIFT CONTROL PARAMETERS Allison S-1 Performance Programming in Primary and Allison Fixed Programming in Secondary

TRANSMISSION SHIFT CONTROL for Column Mounted Stalk Shifter

TRANSMISSION OIL Synthetic; 29 thru 42 Pints

ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks, Construction

PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission

AXLE, REAR, SINGLE {Dana Spicer 21060D} Single Reduction, 21,000-lb Capacity, Driver Control Locking Differential, 200 Wheel Ends . Gear Ratio: 4.88

SUSPENSION, REAR, SINGLE 23,500-lb Capacity, Vari-Rate Springs

SPRINGS, REAR AUXILIARY Multileaf; 4,500-lb Capacity

LOCATION FUEL/WATER SEPARATOR Mounted Outside Left Rail, 41" Back of Cab

FUEL/WATER SEPARATOR {Davco 245} 12 VDC Electric Heater, Includes Pre-Heater, Includes Water-in-Fuel Sensor

FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 19" Tank Depth, 70 US Gal (265L), Mounted Left Side, Under Cab

DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab

CAB Conventional, Day Cab

AIR CONDITIONER with Integral Heater and Defroster

GAUGE CLUSTER Premium Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, Includes 5 Inch LCD Color Display

GRAB HANDLE, CAB INTERIOR (2) Safety Yellow

GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission

GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} with Black Bezel, Mounted in Instrument Panel

IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster

SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, with 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust

SEAT, PASSENGER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolated, 1 Chamber Lumbar, 2 Position Front Cushion Adjustment, -3 to +14 Degree Back Adjust

MIRROR, CONVEX, HOOD MOUNTED SPECIAL, Wiring Only for Right Side Heated Mirror, Does Not Include Mirror or Mounting Brackets

GRAB HANDLE Chrome; Towel Bar Type with Anti-Slip Rubber Inserts; for Cab Entry Mounted Left Side Only at "B" Pillar

**Description**

MIRRORS (2) Aero Pedestal, Power Adjust, Heated, Turn Signals, Bright Heads, Black Arms, 6.5" x 14" Flat Glass, Includes 6.5" x 6" Convex Mirrors, for 102" Load Width

**Notes**

: Mirror Dimensions are Rounded to the Nearest 0.5"

MIRROR, CONVEX, LOOK DOWN Right Side, Bright, 6" x 10.5"

SEAT BELT All Orange; 1 to 3

CAB INTERIOR TRIM Classic, for Day Cab

**Includes**

: CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger

: DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted

: SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap

WINDSHIELD Heated, Single Piece

ARM REST, RIGHT, DRIVER SEAT

WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature

FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood

CAB REAR SUSPENSION Air Bag Type

INSTRUMENT PANEL Wing Panel

ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab

WHEELS, FRONT {Accuride 28828} DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and with Steel Hubs

WHEELS, REAR {Accuride 28828} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and with Steel Hubs

BDY INTG, REMOTE POWER MODULE (2) Mounted Inside Cab Behind Driver Seat, Up to 6 Outputs & 6 Inputs Each, Max 20 amp per Channel, Max 80 amp Total; Includes 2 Switch Packs with Latched Switches

BDY INTG, PTO ACCOMMODATION for Electric over Hydraulic PTO, Does Not Include Solenoids, with Latched Switch Mounted on Dash Includes Audible Alarm and Indicator Light in Gauge Cluster (Requires 1 Remote Power Module input & 1 output)

(4) TIRE, REAR 11R22.5 Load Range G HDR2 (CONTINENTAL), 491 rev/mile, 75 MPH, Drive

(2) TIRE, FRONT 12R22.5 Load Range H HSC1 (CONTINENTAL), 482 rev/mile, 75 MPH, All-Position

Cab schematic 100WK

Location 1: 9219, Winter White (Std)

Chassis schematic N/A

**Services Section:**

WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A

SERVICES, TOWING {Navistar} Service Call to 24-Month/Unlimited Mileage to the Nearest Navistar Dealer for Navistar Warrantable Failure as Contract Defined; Includes Engine Failure if Supplier Declines Tow Coverage & ESC Supplied thru Navistar; \$550 (USA) Maximum Benefit per Incident

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Total Factory List Price Including Options:		\$133,125.00
Total Preparation And Delivery:		\$3,000.00
Freight	\$2,500.00	
Total Freight:		\$2,500.00
Total Factory List Price Including Freight:		\$138,625.00
Less Customer Allowance:		(\$42,162.00)
Total Vehicle Price:		\$96,463.00
Total Sale Price:		\$96,463.00
Total Per Vehicle Sales Price:		\$96,463.00
Net Sales Price:		\$96,463.00

Thank you for the opportunity to offer our quotation for your equipment needs. We look forward to your acceptance of this proposal. All prices are firm for thirty days from the date of this quotation. Prices are subject to revision after this date. Payment terms are C.O.D. No credit card payments will be accepted. Pricing may be subject to federal, state, local taxes and surcharges at time of invoicing.

Despite all efforts by McCandless Truck Center LLC to meet delivery dates, certain contingencies which cannot be foreseen or guarded against may cause delays in production and delivery. Customer agrees that McCandless Truck Center, LLC shall not be held liable for any damages for delays in delivery.

**Approved by Seller:**

**Accepted by Purchaser:**

\_\_\_\_\_  
**Official Title and Date**

\_\_\_\_\_  
**Firm or Business Name**

\_\_\_\_\_  
**Authorized Signature**

\_\_\_\_\_  
**Authorized Signature and Date**

MCCANDLESS TRUCK CENTER LLC  
16704 EAST 32ND AVENUE  
AURORA CO 80011 -  
(303)739-9900

**This proposal is not binding upon the seller without  
Seller's Authorized Signature**

\_\_\_\_\_  
**Official Title and Date**

**The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.**

**The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.**