

Photo 1: Lincoln School circa 1920 – Bell tower is open air.




Photo 2: Current state of the bell tower. Louvres were added in a past renovation.





22.836 BRICKMOULD RADIUS
 21.711 ROUGH OPENING RADIUS
 21.461 TEMPLATE RADIUS
 21.336 FRAME RADIUS
 20.680 NGO RADIUS

THIS DRAWING WAS MADE FROM SOLID CARDBOARD TEMPLATE

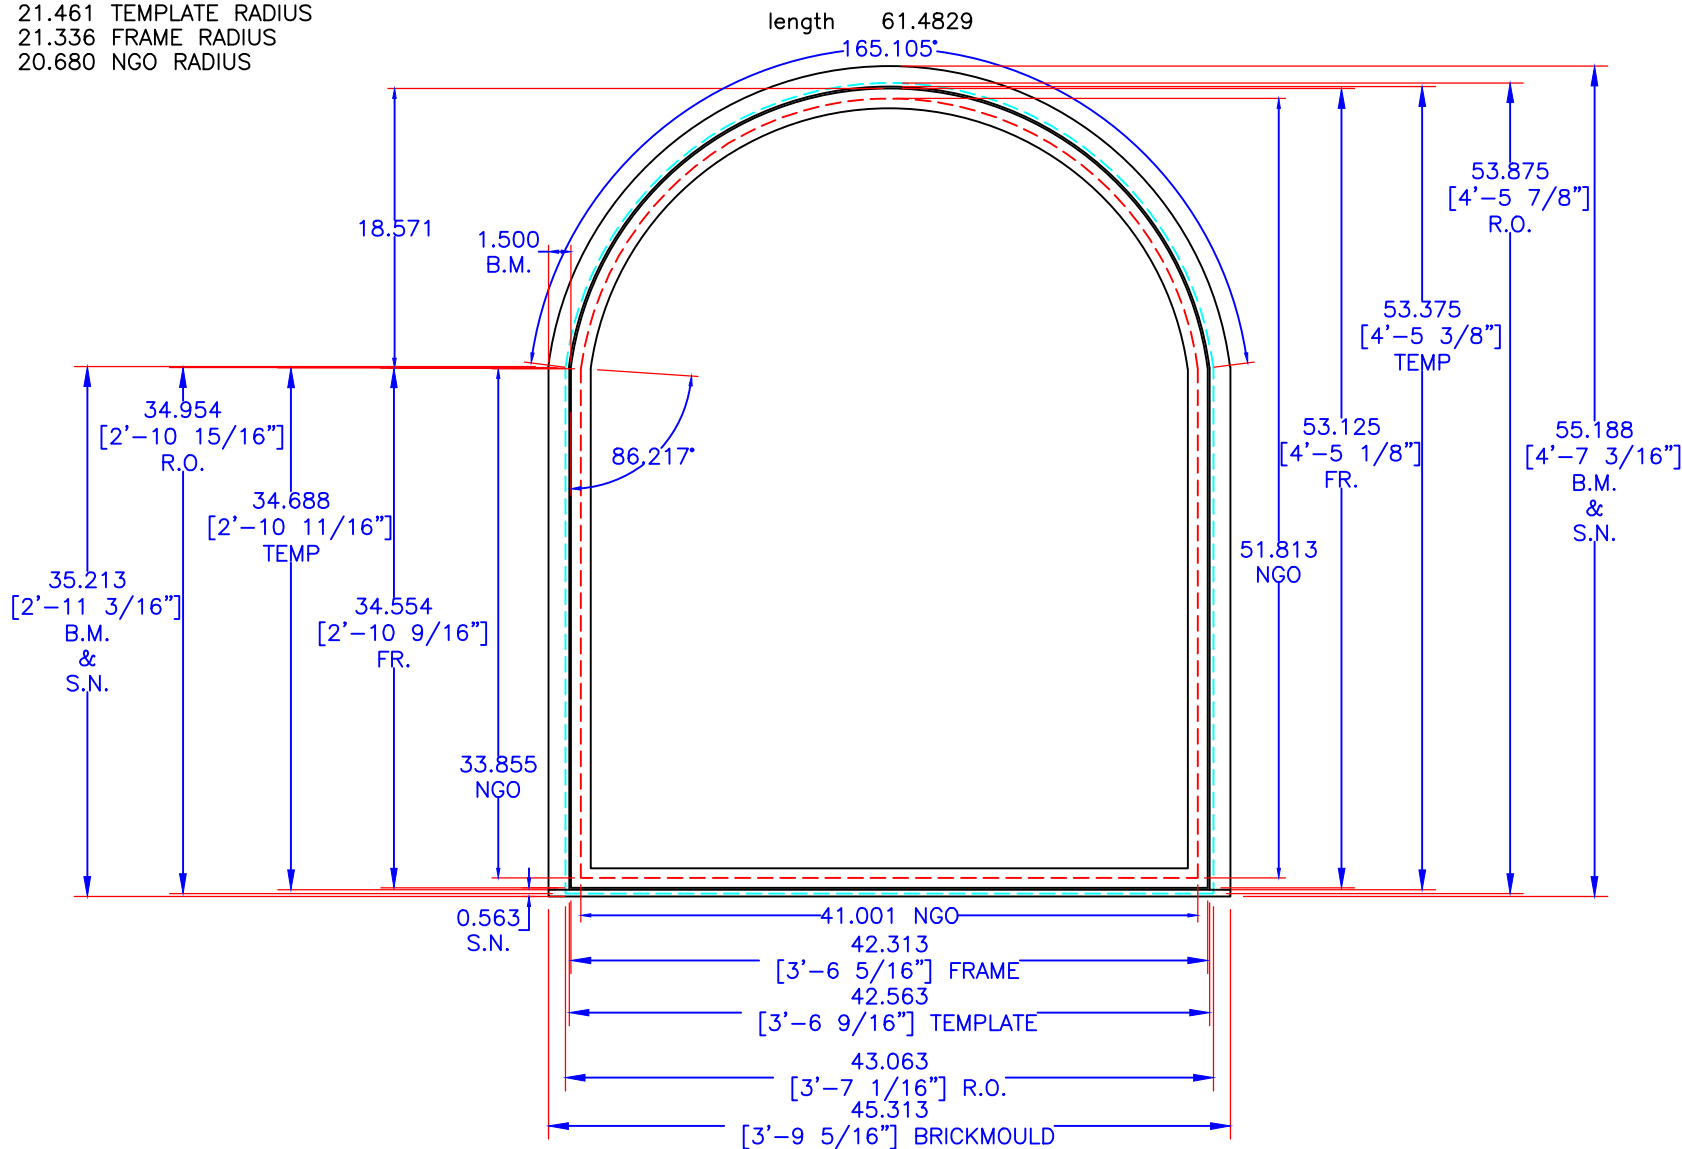


LOCATION:	SIGNATURE INDICATES MY APPROVAL OF DESIGN AND DIMENSIONS AS SHOWN AND I AUTHORIZE PRODUCTION OF SAME.	SIGNATURE:	DATE:
SYMBOL:			

ALL VIEWS ARE FROM EXTERIOR UNLESS OTHERWISE NOTED.				ORDER #: 980-2043		C-SL-42 5/1653 1/8-1		
				ITEM#:				
				CUST: Matt Lewinski				
				DLR/TM:				
				THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION. DO NOT COPY OR DISCLOSE WITHOUT CONSENT OF SIERRA PACIFIC WINDOWS		DRW BY: KD 8/2/25		QUANTITY
						CHK BY:		PAGE 1 OF 1
#	REVISION DESCRIPTION		DATE	BY			DRW NO.SP-511276-44A	
A DIVISION OF 								

LAST SAVED: Kemp/DeLay @ 8/5/2025 1:45:43 PM: LETTER

THIS DRAWING WAS MADE FROM SOLID CARDBOARD TEMPLATE

HEAD LENGTH= 89.2709

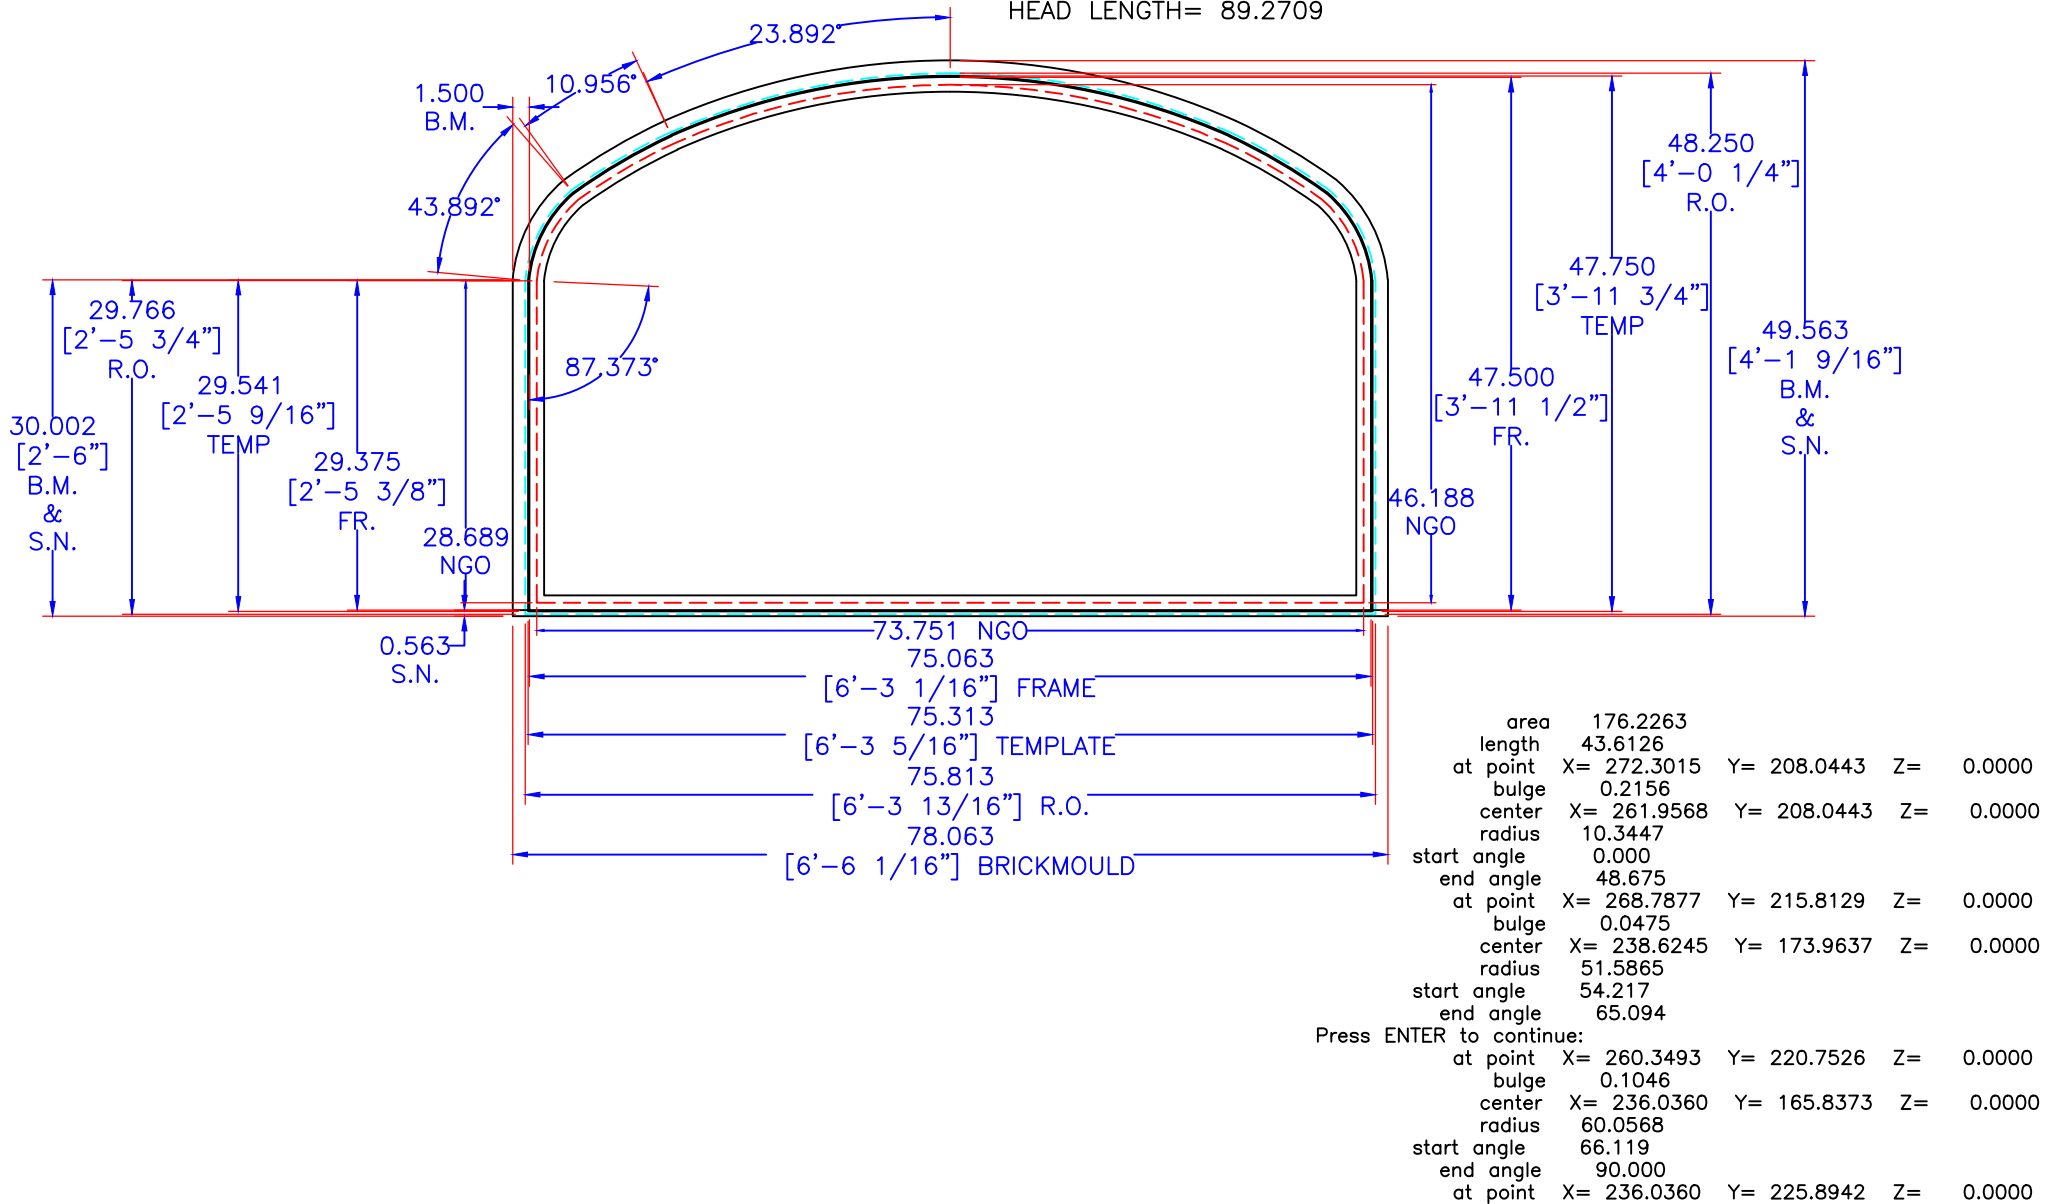

Press ENTER to continue:

LOCATION:

SYMBOL:

SIGNATURE INDICATES MY APPROVAL OF DESIGN AND
DIMENSIONS AS SHOWN AND I AUTHORIZE PRODUCTION OF SAME.

SIGNATURE:

DATE:

ALL VIEWS ARE FROM EXTERIOR UNLESS OTHERWISE NOTED.

ORDER #: 980-2043

ITEM#:

CUST: Matt Lewinski

DLR/TM:

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY
INFORMATION. DO NOT COPY OR DISCLOSE WITHOUT CONSENT OF
SIERRA PACIFIC WINDOWS

C-EL-75 1/1647 1/2-1

DRW BY: KD 8/2/25

QUANTITY

CHK BY:

PAGE 1 OF 1

DRW NO.SP-511277-44A




Clad Direct Glaze



Known for their straight lines, narrow profiles, and large sizes, Sierra Pacific's Direct Glaze windows in geometric or radius shapes will accentuate and amplify your design. And feel free to be creative with your design as we'll work with you to create your own custom shapes.

Standard Construction:

- 0.062" extruded aluminum cladding.
- Clad frame is extruded with integral nail fin and corners are sealed with silicone and foam pads and mechanically fastened.
- Standard 4-9/16" jamb depth. Minimum jamb depth of 3-1/2".
- Standard 3/4" overall glass thickness, glazed from the interior and secured with a removable glazing bead in a traditional and contemporary profile.
- Geometric and radius shapes.

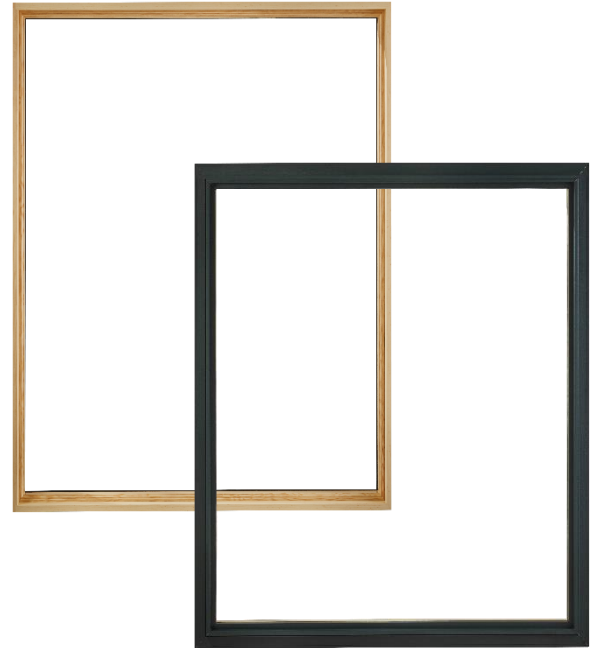

MINIMUM / MAXIMUM FRAME SIZES

Additional sizes may be available upon request and approval.
Min/Max sizes listed **Do Not** apply to radius units. Please contact SPW for details.

DIRECT GLAZE

Minimum Frame Width	6"
Minimum Frame Height	6"
Maximum Frame Width	144"
Maximum Frame Height	144"
Max. Frame Sq. Ft.	60 Sq. Ft.

Performance Data:



Direct Glaze: 96" x 75" (Single Unit Only)

AIR INFILTRATION.....0.01/0.01/Fixed
WATER.....NO LEAKAGE @ 6.06 PSF
STRUCTURAL.....CW-PG40 (+40/-40)



Direct Glaze: 60" x 120" (Single Unit Only)

AIR INFILTRATION.....0.01/0.01/Fixed
WATER.....NO LEAKAGE @ 6.06 PSF
STRUCTURAL.....CW-PG40 (+40/-40)



Direct Glaze: 72" x 60" (Single Unit Only)

AIR INFILTRATION.....0.01/0.01/Fixed
WATER.....NO LEAKAGE @ 8.35 PSF
STRUCTURAL.....CW-PG55 (+55/-55)

For a comprehensive list of tested and rated sizes and configurations, please refer to the Clad Direct Glaze Product Performance Guide (Structural) located in the Technical Resources Library on our website.

Thermal Performance (NFRC):


Air Filled			Argon Filled		
Low-E Clear	Low-E 366	Triple IG LE/CL/CL	Low-E Clear	Low-E 366	Triple IG LE/CL/CL
U-FACTOR.....0.32	U-FACTOR.....0.31	U-FACTOR.....0.24	U-FACTOR.....0.28	U-FACTOR.....0.27	U-FACTOR.....0.21
SHGC.....0.38	SHGC.....0.25	SHGC.....0.35	SHGC.....0.37	SHGC.....0.25	SHGC.....0.35
VT.....0.65	VT.....0.59	VT.....0.59	VT.....0.65	VT.....0.59	VT.....0.59
CR.....52	CR.....52	CR.....62	CR.....55	CR.....55	CR.....64

Values represent Direct Glaze units with insulated glass using standard black warm edge spacer. Additional glazing options available.


For a comprehensive list of glazing configurations, please refer to the Clad Direct Glaze Product Performance Guide (NFRC) located in the Technical Resources Library on our website.

5/12/2022


Direct Glaze - Contemporary 4-9/16" Jamb

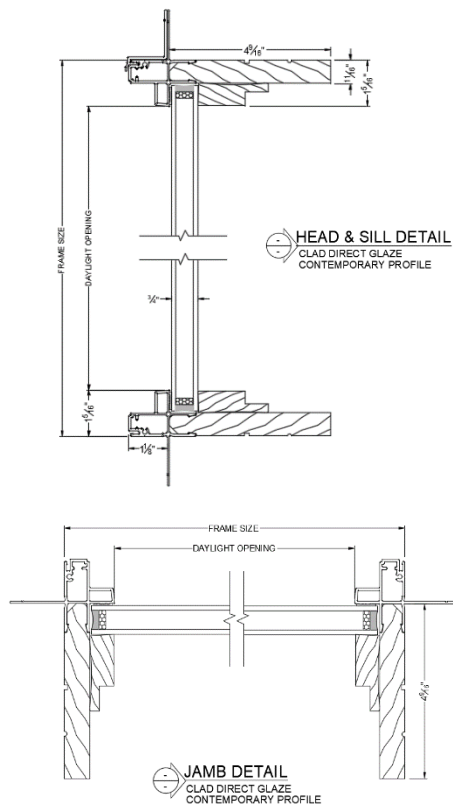

Direct Glaze - Traditional 6-9/16" Jamb



Direct Glaze - Radius Traditional 4-9/16" Jamb

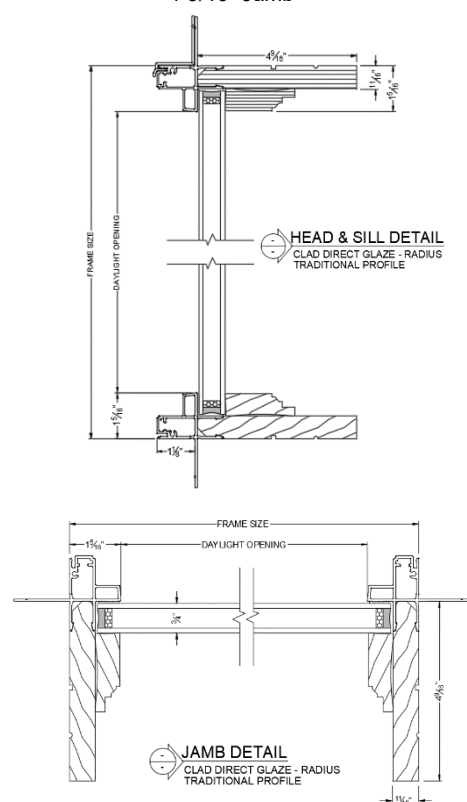

Additional product details may be found on our website www.sierrapacificwindows.com/ProfessionalResources/TechnicalLibrary




Common Direct Glaze shapes. Contact us for virtually limitless available options.

Clad Direct Glaze Additional Features

- Color Palette of 70 powder coated finishes in six design collections that meet AAMA 2605 and AAMA 2604 specifications.
- Extensive offering of performance glass available using black warm edge or Cardinal spacer for optimum efficiency.
- Simulated Divided Lites available in 5/8", 7/8" and 1" Putty; 5/8", 7/8", 1", 1-1/4" and 2" Traditional and Contemporary.
- Grilles-Between-Glass available in 5/8" and 1" flat.
- Factory side-by-side, stacking and pocket mulls. Structural support options available.

Please visit our website www.sierrapacificwindows.com for additional details or to contact your nearest Sierra Pacific Branch or Dealer location.

EXTERIOR TRIM OPTIONS

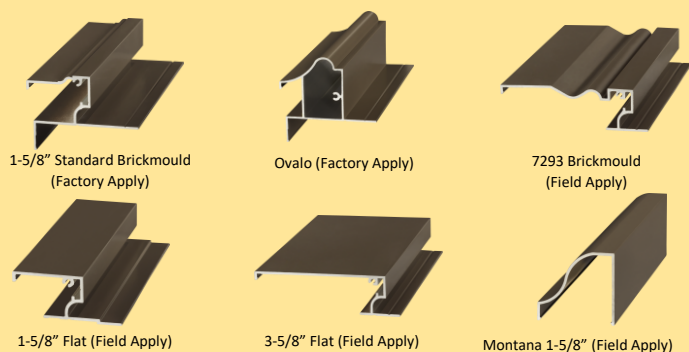

5/12/2022